


HYR-1501 Specifications

寸法 Dimensions

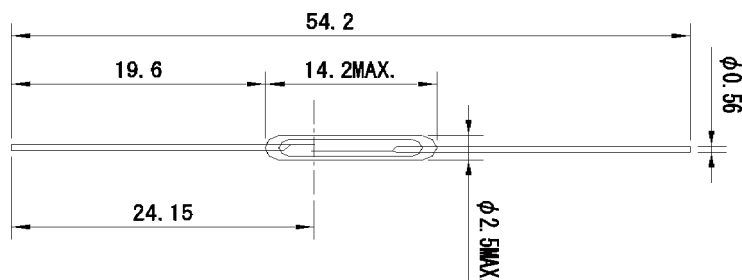

項目 Item		HYR-1501
接点 Contact	接点タイプ Contact type	1A
	接点タイプ Contact position	オフセット Offset gap
	接点材料 Contact material	ロジウム Rhodium
電气的特性 Electrical characteristics	感動値 Pull In Value	15-50AT
	開放値 Drop Out Value(Min.)	5AT
	最大開閉電力 Maximum switching electric power	20W
	最大開閉電圧 Maximum switching voltage	200VDC
	最大開閉電流 Maximum switching current	0.5A
	最大通電電流 Maximum carry current	1.0A
	接点接触抵抗 Contact resistance	150mΩ
	耐電圧 Breakdown voltage	250VDC(min.)
	絶縁抵抗 Insulation resistance	10 ¹⁰ Ω (min.)
動作特性 Operating characteristics	接点間静電容量 Contact capacitance	0.4pF
	動作時間 Operate time	1.0ms (max.)
	バウンス時間 Bounce time	0.5ms (max.)
	復旧時間 Release time	0.5ms (max.)
その他 Others	共振周波数 Resonant frequency	3.5kHz
	寿命 Life	1×10 ⁸ (10mVDC,10μA)
	コイル Standard Coil	1×10 ⁵ (100VDC,100mA)
	特徴 Features	TC-0502 オフセット、高容量 Offset gap、High power