


NRS-701 Specifications


寸法 Dimensions

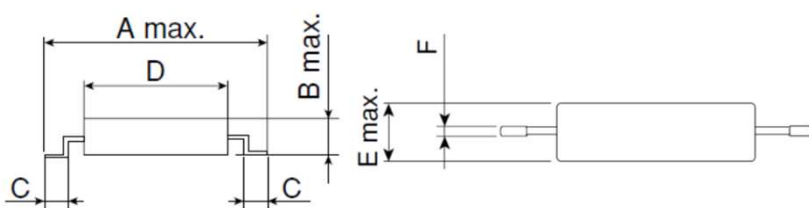

A	13.0
B	2.2
C	1.2
D	8.3
E	2.4
F	0.4


項目 Item		NRS-701
接点 Contact	接点タイプ Contact type	1A
	接点材料 Contact material	ルテニウム Ruthenium
電气的特性 Electrical characteristics	感動値 Pull In Value ※加工前感度	10-30AT ※before modifying
	開放値 Drop Out Value(Min.) ※加工前感度	5AT ※before modifying
	最大開閉電力 Maximum switching electric power	1W
	最大開閉電圧 Maximum switching voltage	30VDC
	最大開閉電流 Maximum switching current	0.1A
	最大通電電流 Maximum carry current	0.3A
	接点接触抵抗 Contact resistance	300mΩ
	耐電圧 Breakdown voltage	200VDC(min.)
	動作時間 Operate time	1.0ms (max.)
	バウンス時間 Bounce time	0.5ms (max.)
動作特性 Operating characteristics	復旧時間 Release time	0.1ms (max.)
	寿命 Life	1×10 ⁷ (5VDC,10mA)
その他 Others	コイル Standard Coil	N-103
	特徴 Features	極超小型、表面実装型モールドスイッチ Super ultra miniature、SMT MOLD

テープ寸法

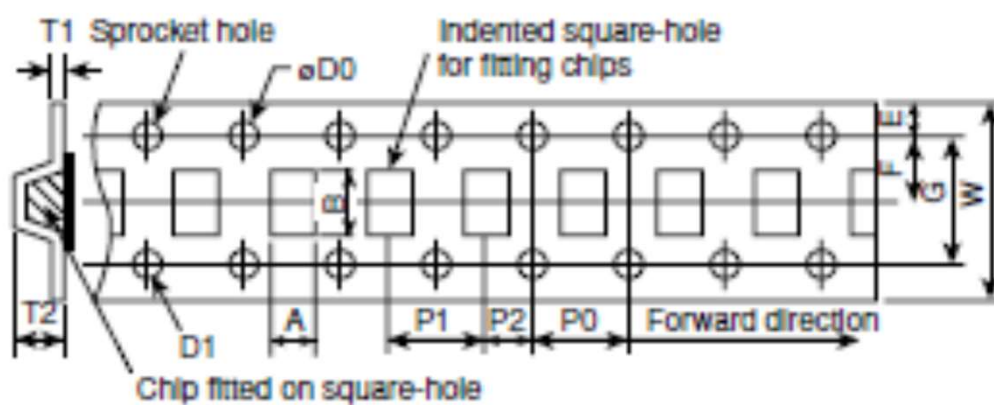

シリーズ名	A	B	W	F	E	G	D1	P1	P2	P0	D0	T1	T2
RD-18B	2.0	13.2	24.0	11.5	1.75	—	—	8.0	2.0	4.0	1.55	0.3	(3.0)
RD-7B	4.0	20.3	32.0	14.2	1.75	28.4	1.55 × 1.75	8.0	2.0	4.0	1.55	0.3	(3.0)
NRS-701	2.7	16.6	24.0	11.5	1.75	—	—	8.0	2.0	4.0	1.55	0.4	(3.2)

リール寸法

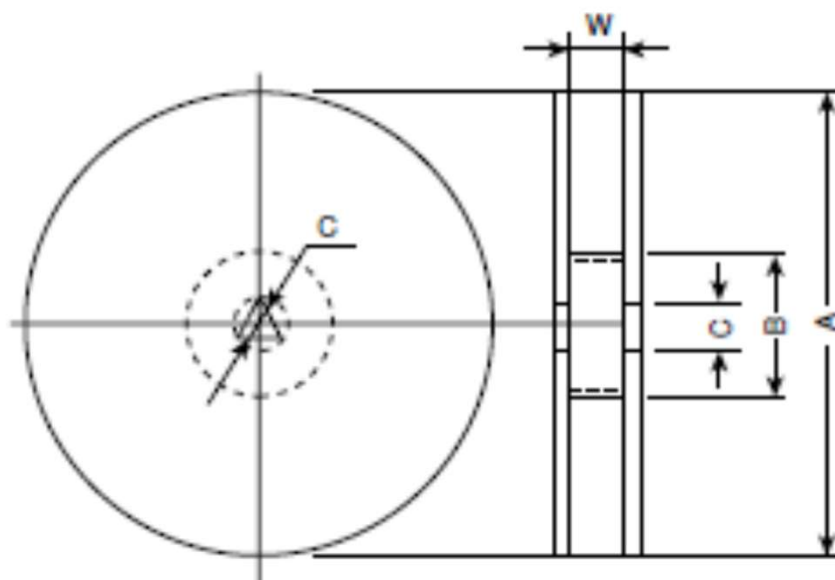

シリーズ名	A	B	C	W
RD-18B	250	100	13	24.5
RD-7B	330	100	13	33.5
NRS-701	330	80	13	24.5